Acritec
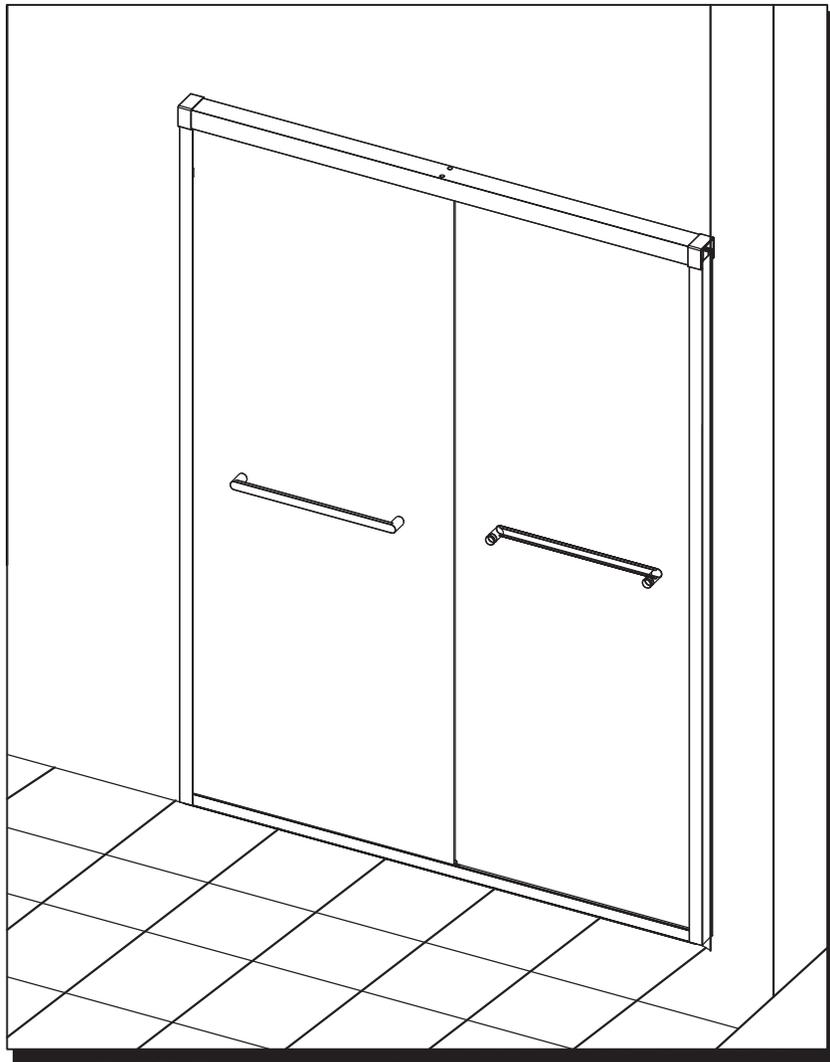
B03 Series
Single Threshold Sliding Bypass Door

Updated: 2021/05/14

INSTALLATION MANUAL

IMPORTANT
- Thoroughly inspect your product before proceeding with the installation.
- The warranty will be void if the product is installed with a conspicuous defect.

CAUTION
- To prevent leaks, silicone must be applied on the outside of the shower and not on the inside!
- Read all instructions carefully before starting the installation.
- Save this manual for future reference.

PARTS LIST
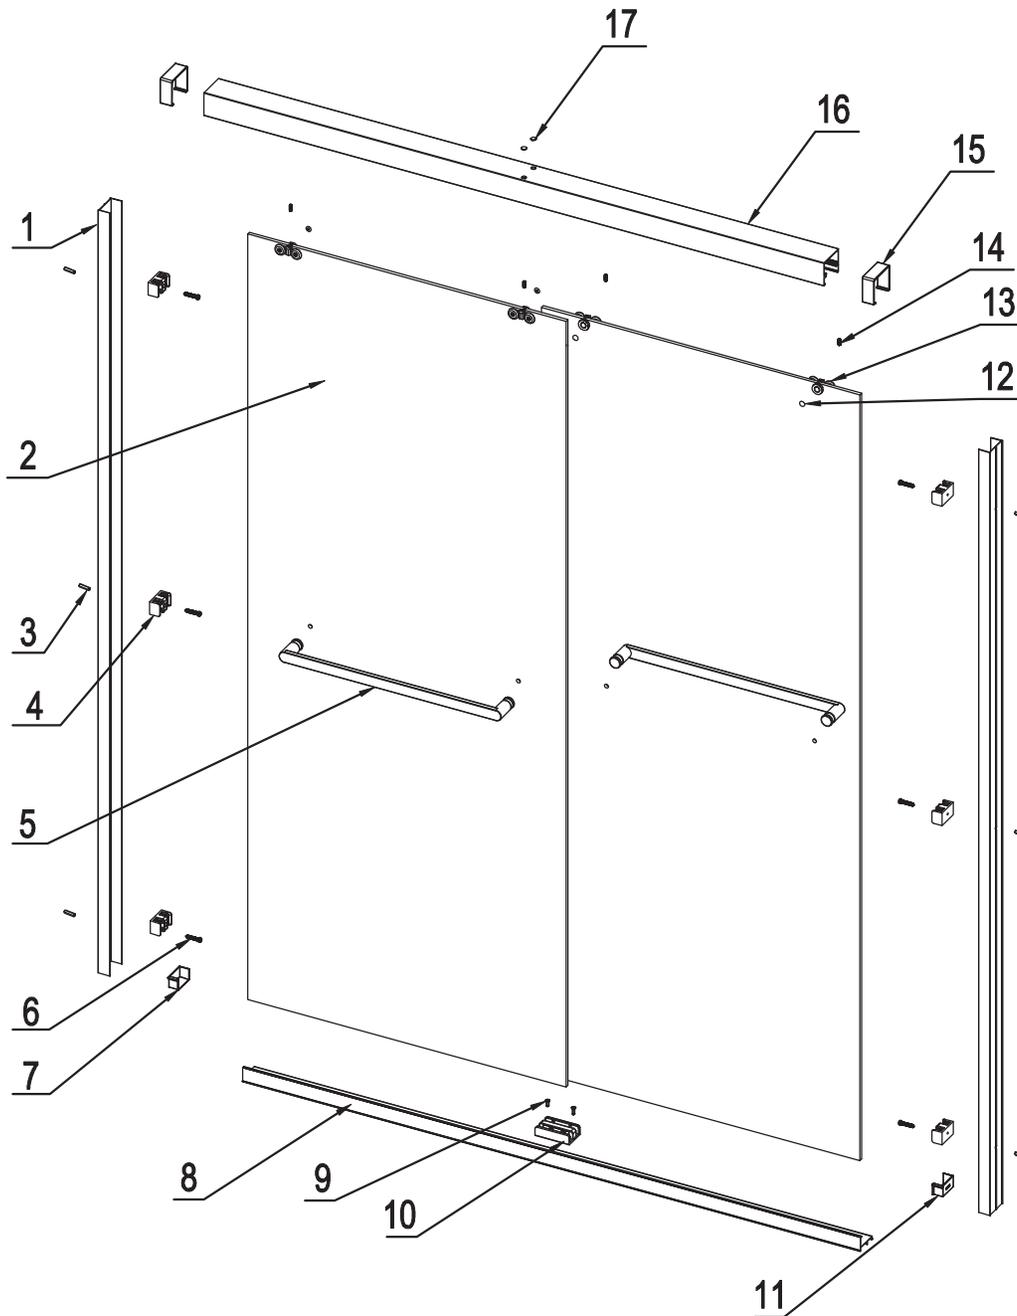
No.	Name	Qty	No.	Name	Qty
1	Wall profile UR	2	10	Guide block	1
2	Door panel	2	11	Bottom track cover, right	1
3	Wall plug	6	12	Roller cover	4
4	Bumper block	6	13	Roller	4
5	Handle	2	14	M5*16grub screw	4
6	ST4*30 Screw	6	15	Top track cover	2
7	Bottom track cover	1	16	Top track	1
8	Bottom track	1	17	Ø10 cover cap	2
9	ST4*10 Screw	2			

COMPONENT LIST
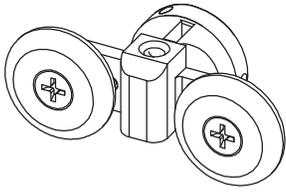
Roller
x4

Top track cover
x2

Bottom track cover
left x1

Bottom track cover
right x1

Bumper block
x6

Guide block
x1

Handle
x2

Cover cap
x2

Roller cover
x4

Screw
x2

2.5mm hex wrench
x1

M5*16 Grub screw
x4

Screw
x6

Wall plug
x6

4mm hex wrench
x1

TOOLS AND MATERIALS REQUIRED

DRILL

SCREWS

SCREWDR

LEVEL

PRECISION KNIFE

SILICONE

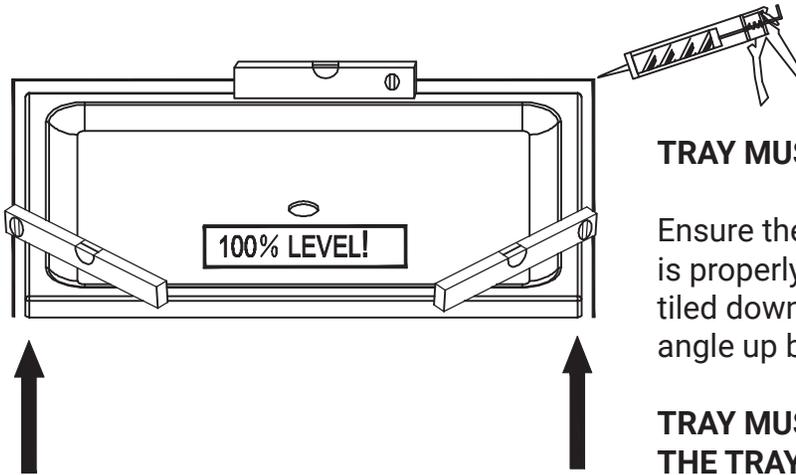DRILL BITS: 1/8" / 1/4"
*MASONRY DRILL BIT

MEASURING TAPE

SET SQUARE

PENCIL

MALLET

**TRAY MUST BE 100% LEVEL IN ALL DIRECTIONS**

Ensure the shower tray is level in all direction and is properly sealed to the wall. The wall must be tiled down to the bottom edge of the tray. Do not angle up bottom tile.

**TRAY MUST BE SEALED FULLY AROUND WHERE THE TRAY MEETS THE WALL.**

IMPORTANT

1. Ensure the top surface of the shower tray on which the enclosure which be installed is level in every direction.
2. The tiling or other wall finishing should be effectively sealed at the tray edges.
3. Tiles should extend at least to the corners of the tray and a minimum of 2.1m from top of the tray.

WALL JAMB INSTALLATION
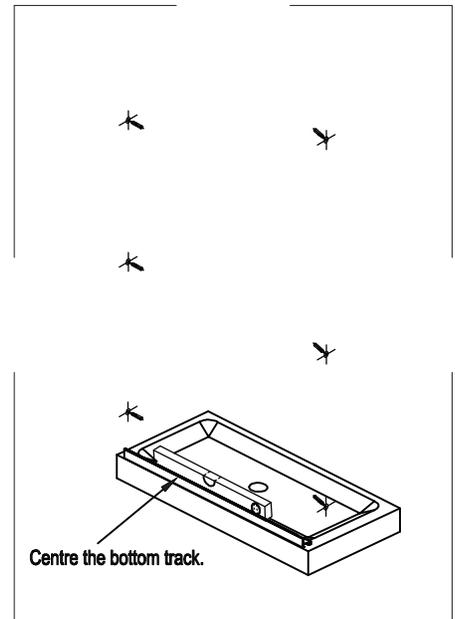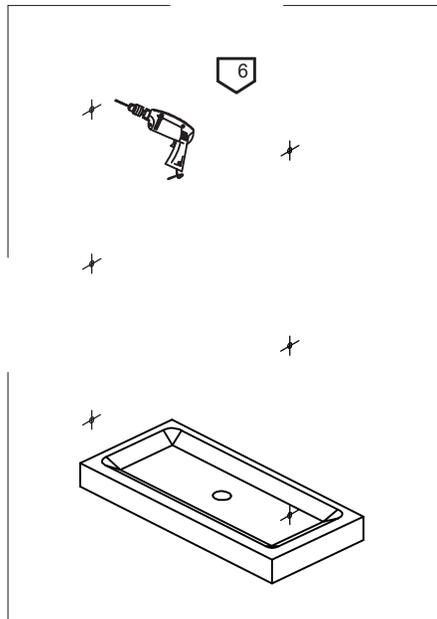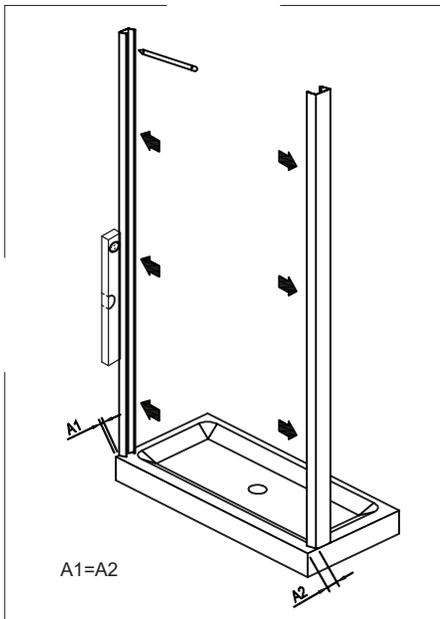
1 Move the two wall profiles to the installation position. The outer edge of the wall profile is flush with the shower tray.
After the wall profile is adjusted to be perpendicular to the ground, a line is drawn on the wall to mark the drilling position. Note: When marking the drilling position, make sure it is in the center of the aluminum screw hole for easy installation and adjustment. Drill a hole of 06 at the marking on the wall, and put in the wall plug.
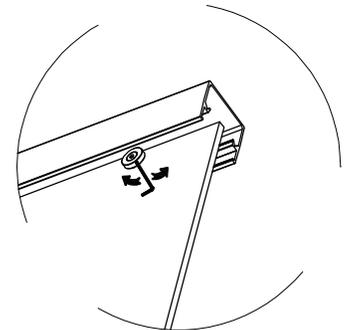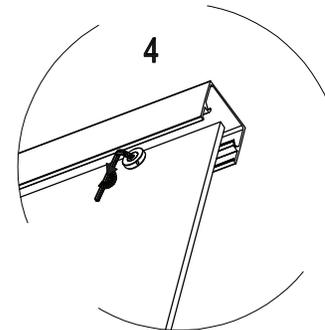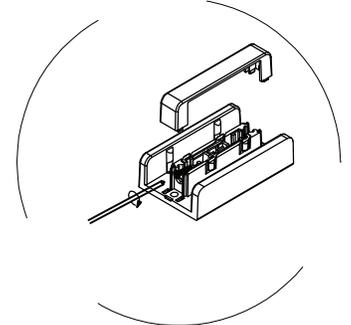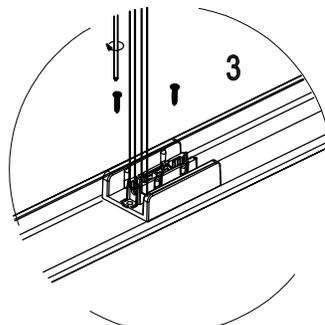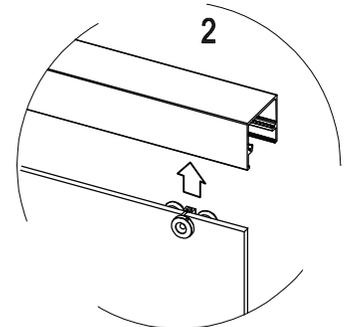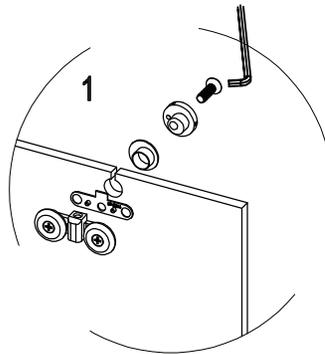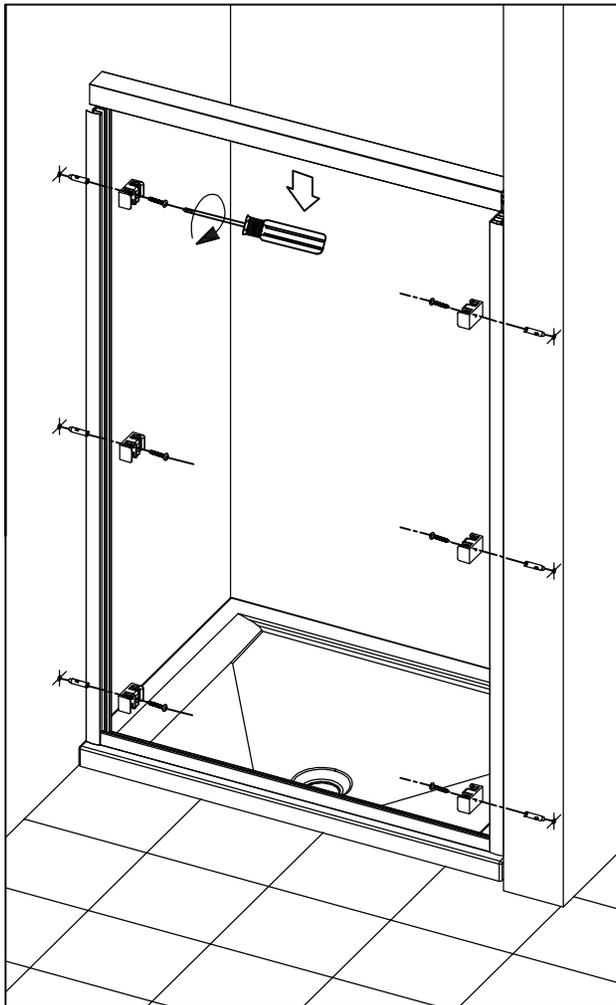
2 Put the top track on the wall and install the door panel:

    1. Install the rollers to the door panel;

    2. Hang the door panel on the inner groove of the top track;

    3. Install the lower slide block on the bottom tracm;

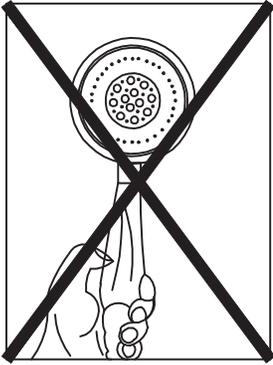   4. Adjust the glass height and ensure glass is level.

3
1. Install handle.
2. Install grub screw to roller bracket, tigeten and install cover cap.
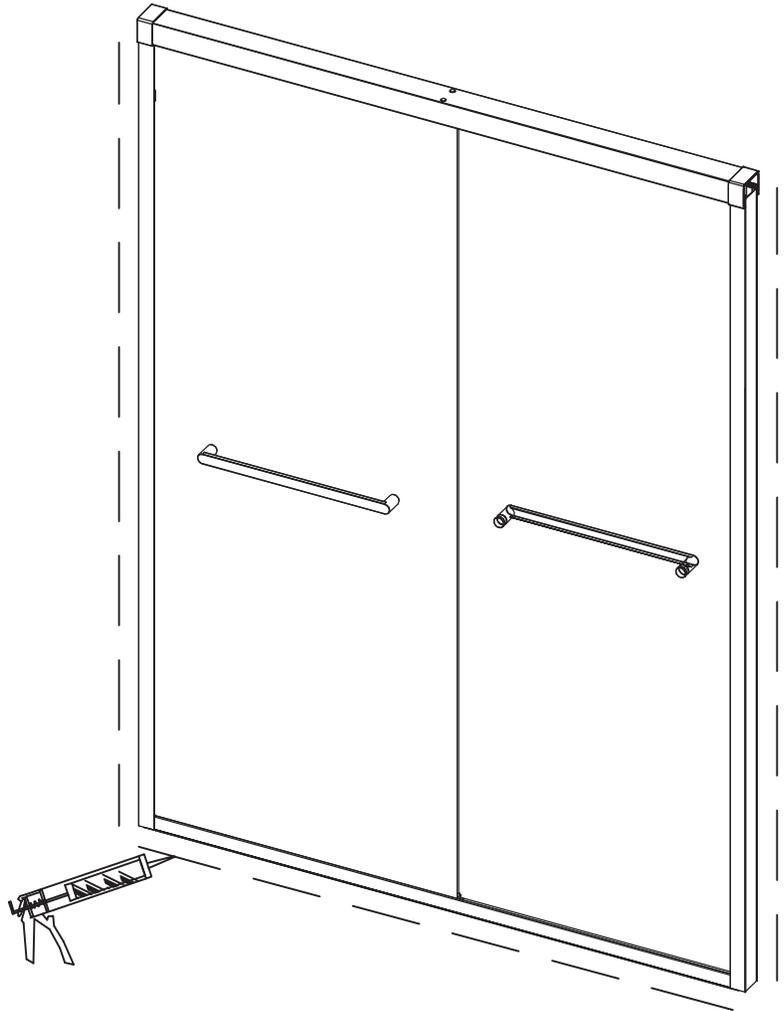3. Install top/bottom track covers.
4. Install roller cap.
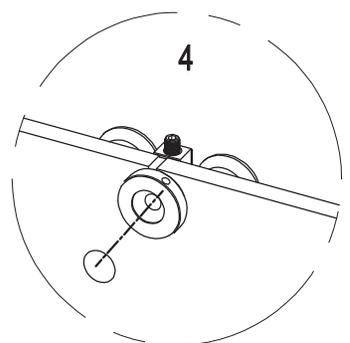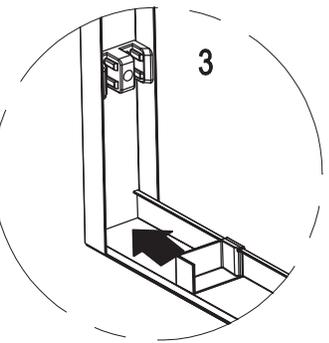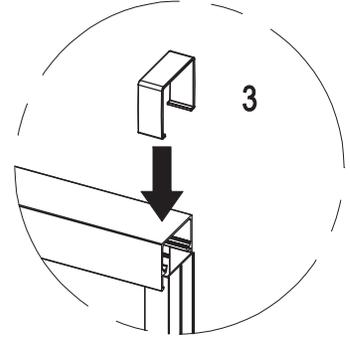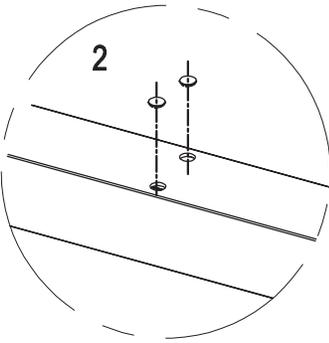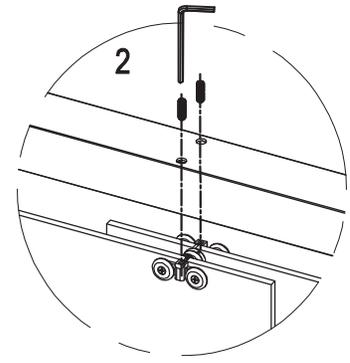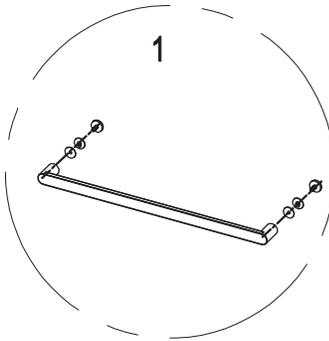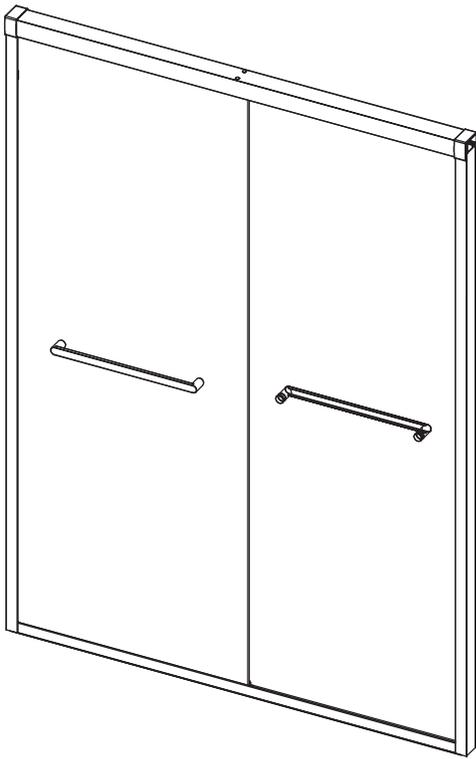
Adjust gap between guide block and glass.
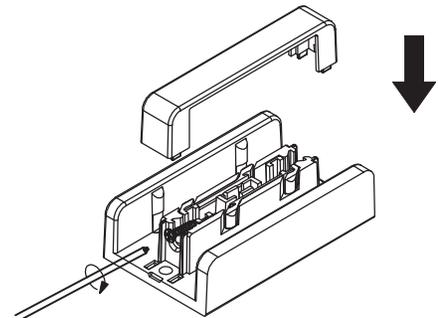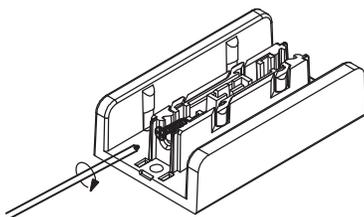
24 HRS

Do not use the enclosure
for 24 hours after sealing.

4 Apply silicone to inside and outside of the shower enclosure.

Do not use the enclosure for 24 hours after sealing.

Acritec

Acritec Industries Corp.

27049 Gloucester Way
Langley, B.C. V4W 3Y3

Tel: 604.607.0856
Fax: 604.607.0857
Email: info@acritec.com
Website: www.acritec.com